

The length of **diamond segment for single blade** is 30mm and the width is 10 and 11mm. Because the head is designed with slope, the thickness on both sides of the head is different and the height is 30mm. It is used in single arm machine and bridge cutting machine.

The thicker side of the cutter head is connected with the saw blade. The normal thickness of the cutter head is greater than the thickness of the matrix, so that the saw blade matrix is not rubbed during cutting, with small resistance and fast cutting.

Feature:

- 1.Low noise, low pollution, small cutting groove, improve cutting efficiency.
- 2.2 stages of ">" shape on sides to protect the core blade during the cutting.
- 3. Reduce vibration and noise. The gradient design of the cutter head is conducive to protecting the substrate and reducing resistance.
- 4. It is made of high-grade diamond particles and a variety of metal powders by hot pressing, with large output.

Product Specification:

The following are normal specifications diamond segment for single blade:

Blade Diameter	Seg	ment Size		Machine	
blade Diameter	L	W	Н	Machine	
Diamond Segment For Single Blade	30MM	10/11MM	30MM	Single Arm Machine,Bridge Cutting Machine	

The above specifications is only for reference, other specifications may be available as per customer's demand.

Other specifications of cutter segment:

Dian	neter	Thickness	Teeth		Segment S	egment Size		Max. RPM	Cutting Stone
Inch	mm	mm	pcs/set	L	W	Н	mm	RPM	#
10"	250	1.8(2.2)	17	40	3.2	8/10/12	50/60	3450	Granite
12"	300	1.8(2.2)	21	40	3.2	12/15/20	50/60	2850	Granite
14"	350	2.2(2.4)	24	40	3.2	12/15/20	50/60	2450	Granite
16"	400	2.6(2.8)	28	40	3.6	12/15/20	50/60	2150	Granite
18"	450	2.8(3.0)	32	40	4.2	12/15/20	50/60	1900	Granite
20"	500	2.8(3.0)	36	40	4.2	12/15/20	50/60	1750	Granite
24"	600	3.6(3.2)	42	40	4.6	12/15/20	50/60	1450	Granite
32"	800	4.2(4.5)	57	40	5.5	12/15/20	50/60	1150	Granite
36"	900	5.0(5.5)	64	40	6.5	12/15/20	60/80	950	Granite
36"	900	5.0(5.5)	64	24	7.0/6.2	13/15/20	60/80	950	Granite
40"	1000	5.0(5.5)	70	24	7.0/6.2	13/15/20	80/100	850	Granite
48"	1200	5.5(6.0)	80	24	7.4/6.6	13/15/20	80/100	750	Granite
56"	1400	6.0(6.5)	92	24	8.4/7.6	13/15/20	80/100	600	Granite
64"	1600	6.5(7.2)	108	24	9.2/8.4	13/15/20	80/100	550	Granite
72"	1800	7.2(8.0)	120	24	10.0/9.2	13/15/20	80/100	500	Granite
80"	2000	8.0(9.0)	128	24	11.0/10.0	15/20	100/120	450	Granite
86"	2200	8.0(9.0)	132	24	11.0/10.0	15/20	100/120	400	Granite
100"	2500	9.0(10.0)	140	24	12.0/11.0	15/20	100/120	350	Granite
120"	3000	9.0(10.0)	160	24	12.5/11.5	20/30	100/120	300	Granite
140"	3500	9.0(10.0)	180	24	13.0/12.0	20/30	100/120	250	Granite


Other specifications of cutter segment:


Blade Diameter	Thickness	Segment Size	Cutting Stone
#	mm	LxWxH	#
2200-600 Multi	4.5	24x6.4/5.6x13H(15H)	Granite
2200-600 Multi	5.0	24x7.0/6.2x13H(15H)	Granite
2200-600 Multi	5.5	24x7.4/6.6x13H(15H)	Granite
2200-600 Multi	6.5	24x8.4/7.6x13H(15H)	Granite
2500-800 Multi	5.5	24x7.4/6.6x13H(15H)	Granite
2500-800 Multi	6.5	24x8.4/7.6x13H(15H)	Granite
2500-800 Multi	7.2	24x9.2/8.4x13H(15H)	Granite
1600-960 Multi	6.5	24x8.4/7.6x13H(15H)	Granite
1600-960 Multi	7.2	24x9.2/8.4x13H(15H)	Granite
40"/1000mm	4.5-5.0	24x7.0/6.2x13H(15H)	Granite
48"/1200mm	5.0-5.5	24x7.5/6.5x13H(15H)	Granite
64"/1600mm	6.5-7.2	24x9.2/8.4x13H(15H)	Granite
48"/1200mm	4.0	24x5.5x8H(10H)	Marble
48"/1200mm	4.5	24x6.0x8H(10H)	Marble
48"/1200mm	5.0	24x7.5x8H(10H)	Marble
48"/1200mm	5.5	24x8.0x8H(10H)	Marble
64"/1600mm	6.5-7.2	24x9.2x10H(8H)	Marble
64"/1600mm	6.5-7.2	24x9.5x13H(10H)	Marble
	# 2200-600 Multi 2200-600 Multi 2200-600 Multi 2200-600 Multi 2500-800 Multi 2500-800 Multi 2500-800 Multi 1600-960 Multi 1600-960 Multi 40"/1000mm 48"/1200mm 48"/1200mm 48"/1200mm 48"/1200mm 48"/1200mm 48"/1200mm	# mm 2200-600 Multi 4.5 2200-600 Multi 5.0 2200-600 Multi 5.5 2200-600 Multi 6.5 2500-800 Multi 5.5 2500-800 Multi 6.5 2500-800 Multi 7.2 1600-960 Multi 6.5 1600-960 Multi 7.2 40"/1000mm 4.5-5.0 48"/1200mm 5.0-5.5 64"/1600mm 4.5 48"/1200mm 5.0 48"/1200mm 5.0 48"/1200mm 5.0 48"/1200mm 5.0 48"/1200mm 5.0 48"/1200mm 5.0	# mm LxWxH 2200-600 Multi 4.5 24x6.4/5.6x13H(15H) 2200-600 Multi 5.0 24x7.0/6.2x13H(15H) 2200-600 Multi 5.5 24x7.4/6.6x13H(15H) 2200-600 Multi 6.5 24x8.4/7.6x13H(15H) 2500-800 Multi 5.5 24x7.4/6.6x13H(15H) 2500-800 Multi 5.5 24x8.4/7.6x13H(15H) 2500-800 Multi 7.2 24x9.2/8.4x13H(15H) 1600-960 Multi 7.2 24x9.2/8.4x13H(15H) 1600-960 Multi 7.2 24x9.2/8.4x13H(15H) 40"/1000mm 4.5-5.0 24x7.0/6.2x13H(15H) 48"/1200mm 5.0-5.5 24x7.5/6.5x13H(15H) 48"/1200mm 4.0 24x5.5x8H(10H) 48"/1200mm 5.0 24x7.5x8H(10H) 48"/1200mm 5.0 24x7.5x8H(10H) 48"/1200mm 5.0 24x7.5x8H(10H) 48"/1200mm 5.0 24x7.5x8H(10H) 48"/1200mm 5.5 24x8.0x8H(10H) 64"/1600mm 6.5-7.2 24x9.2x10H(8H)

The above specifications is only for reference, other specifications may be available as per customer's demand.

Product show

Diamond Cutting Segment for Single Blade Manufacturer

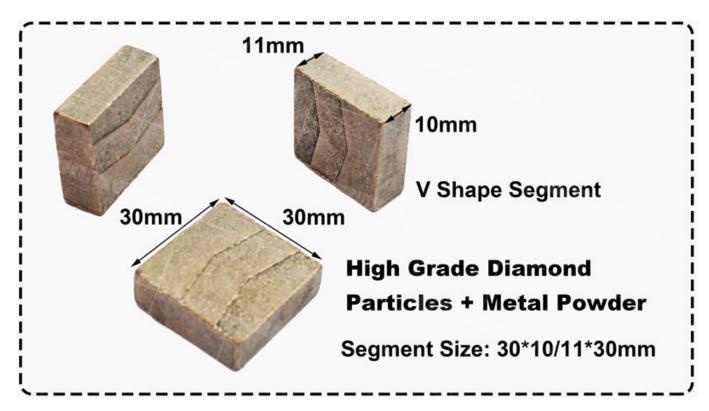

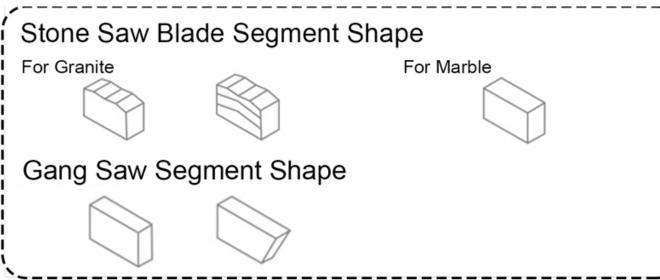


Application:

Diamond segment for single blade, use for bridge cutting machine and single arm machine.

Diamond saw blade segment for granite, sandstone, various hard stone.

Diamond segment cutting supplier china using in block cutting for 900-3500mm circular saw blades for block cutting.

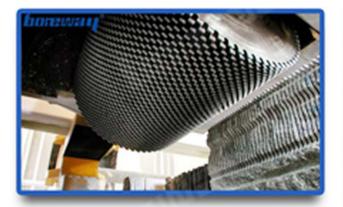














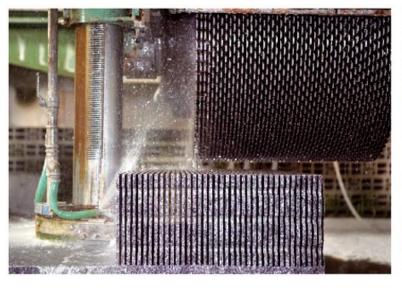



1.Can you accept OEM orders?

Yes, with professional design team, OEM orders are highly welcome.

2. What is your terms of payment?

We accept DHL,Fedex,TNT, UPS, etc.

3.Do you provide samples? Is it free or extra?

Yes, we could offer you the sample machine. But it's not free. You need to pay for the sample and the cost of freight.













Contact Us:

Fujian Nanan homeway Machinery Co.,Ltd.

No.605 Huahui Center, Shuitou Town 362342 Quanzhou, Fujian, China

TEL: (+86)595-86990206 / **Pax:** (+86)595-86990220

Mobile/WhatsApp/Wechat: (+ 86) 18650679939

E-mail: boreway@boreway.com

