



400	40	3.4 / 3.6 / 3.8	8/10/12/15	28
450	40	4.0 / 4.2	8/10/12/15	32
500	40	4.0 / 4.2	8/10/12/15	36
600	40	4.6 / 4.8	8/10/12/15	42
700	40	5.5 / 5.2	8/10/12/15	42
800	40	6.0	8/10/12/15	46

□□□ □□ □□ □ **W** □ □□□ □□□□ □□ □□□□ □□□□, □□ □□ □□□ □□□ □□ □□□□ □□□□□□□□. □□ □□□ □□ □□□ □□ □□□ □□ □□□□.

□□ □□ □□:

□□□ □□ □□ □□ **W** □□ □□□ □□□□ □□ □□□□ □□□□ :



W Shape Structure, reduce the cutting resistance, improve the cutting speed.


□□ :

□□□ □□ □□ □□ **W** □□ □□□ □□□□ □□ □□□□ □□□□. □□□□□ □□□□ □□□□, □□, □□□□ □□□ □□ □□ □□□ □□□ □□ □.


## Applicable materials

To meet your demands for cutting different materials, such as granite, marble, quartz stone, sand stone, microcrystalline stone, volcanic rock, concrete, glass, ceramic, masonry etc. Different segments recipe were been developed by our company.



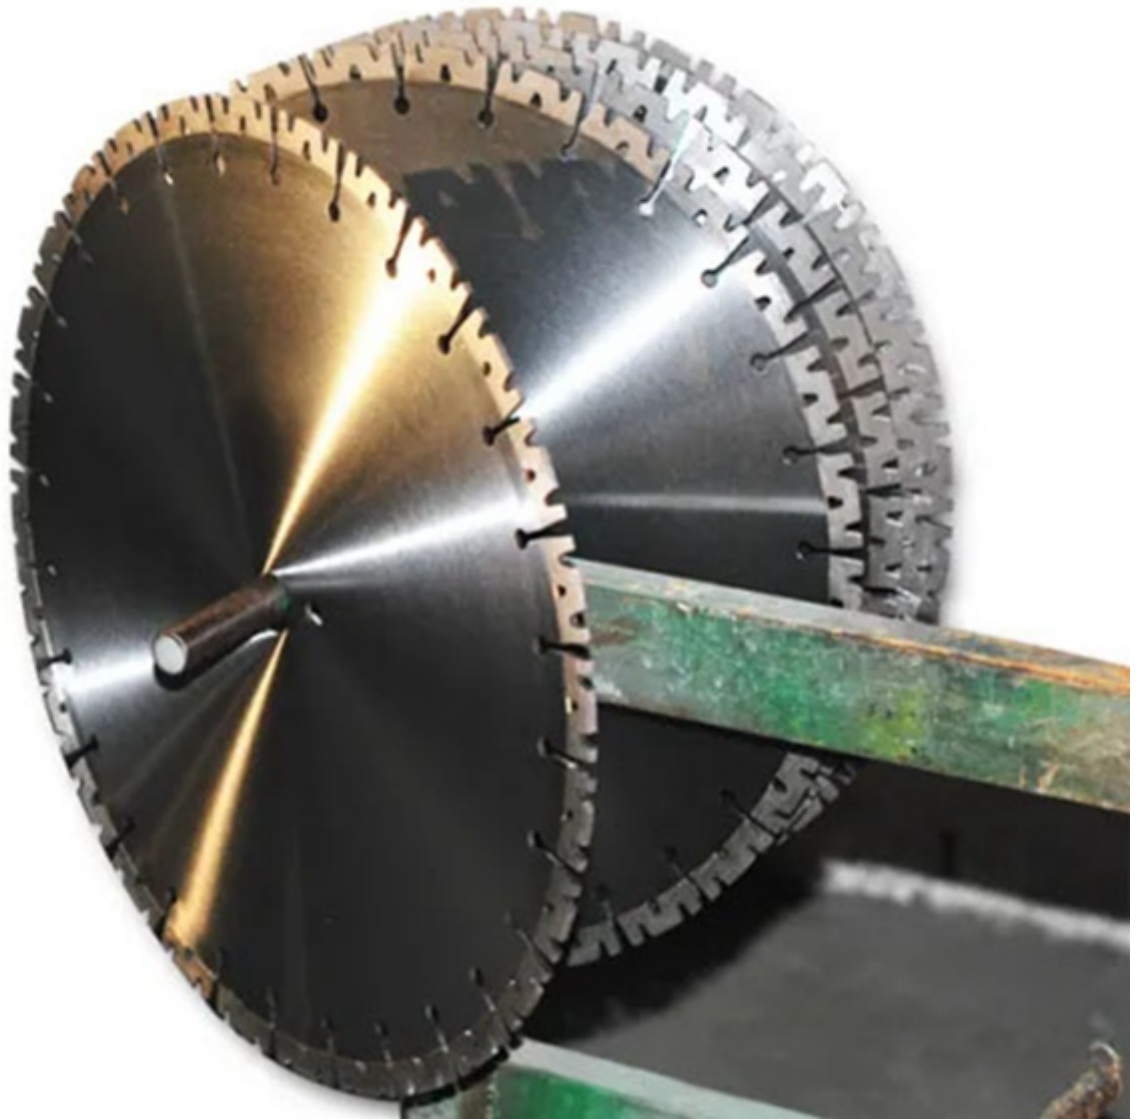

□□ □□ :

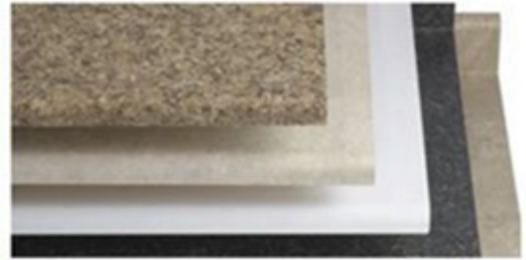


□□ :

1. □□□□ □□□□ □□ □□ □□ □□□□.
2. Excellent □□□ □ □□ □□.
3. High □□ □□□, □□, □ □□□ □□□□.

□□□□ □□ :

□□.□□□□.□□.□□□□, □□□□ □□□ □□ □□ □□□□ □□□□ :

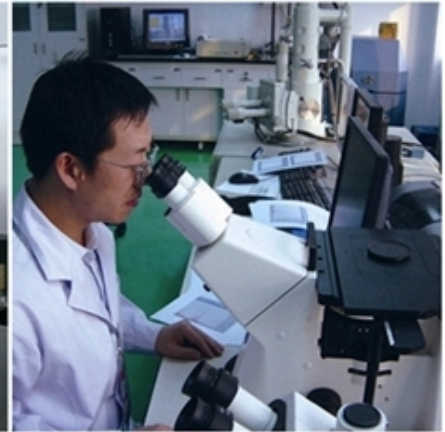

□ □ □ □ :



**□□□ □□□:**

1. □□ □□ □□ : □□□ □□□ □□□□□ □□□ □□□ □□ □ □□□□.
2. □□ □□ : □□ □□ □□□□□ □ □□□□□□□□.
3. □□ □□□ □□□ : □□□ □□□ □□ □□ □□□ □□ □□□□ □□□□.
4. □□ □□ : □□□ □□□ □□ □□ □□□ □□□□. □□□□ □□ □□□ □□ □□□□.
5. □□ □□□ : □□□ □□ □□□ □□□□ □□□□ □□□ □□□□□ □□□□□.

**□□□□ □□:**

1. □□□□□ □□□□□ □□ □□□ □□□ □□□ □ □ □□□□?  
 □□ □□□□ □□□□□ □□□□ □□□ □□□ □□□□□ □□□□ □□□ □□ □ □□□□. □□□ □□ □□□ □□□ □□ □□ □□ □□□ □ □ □ □□□ □□□□.
2. □□□□□ □□□□□ □□□ □□ □□□ □□□□□□□□□?  
 □□□ □□ □□□ □□□ □□□□□□□. □ :

